



# Curve With Basket weave

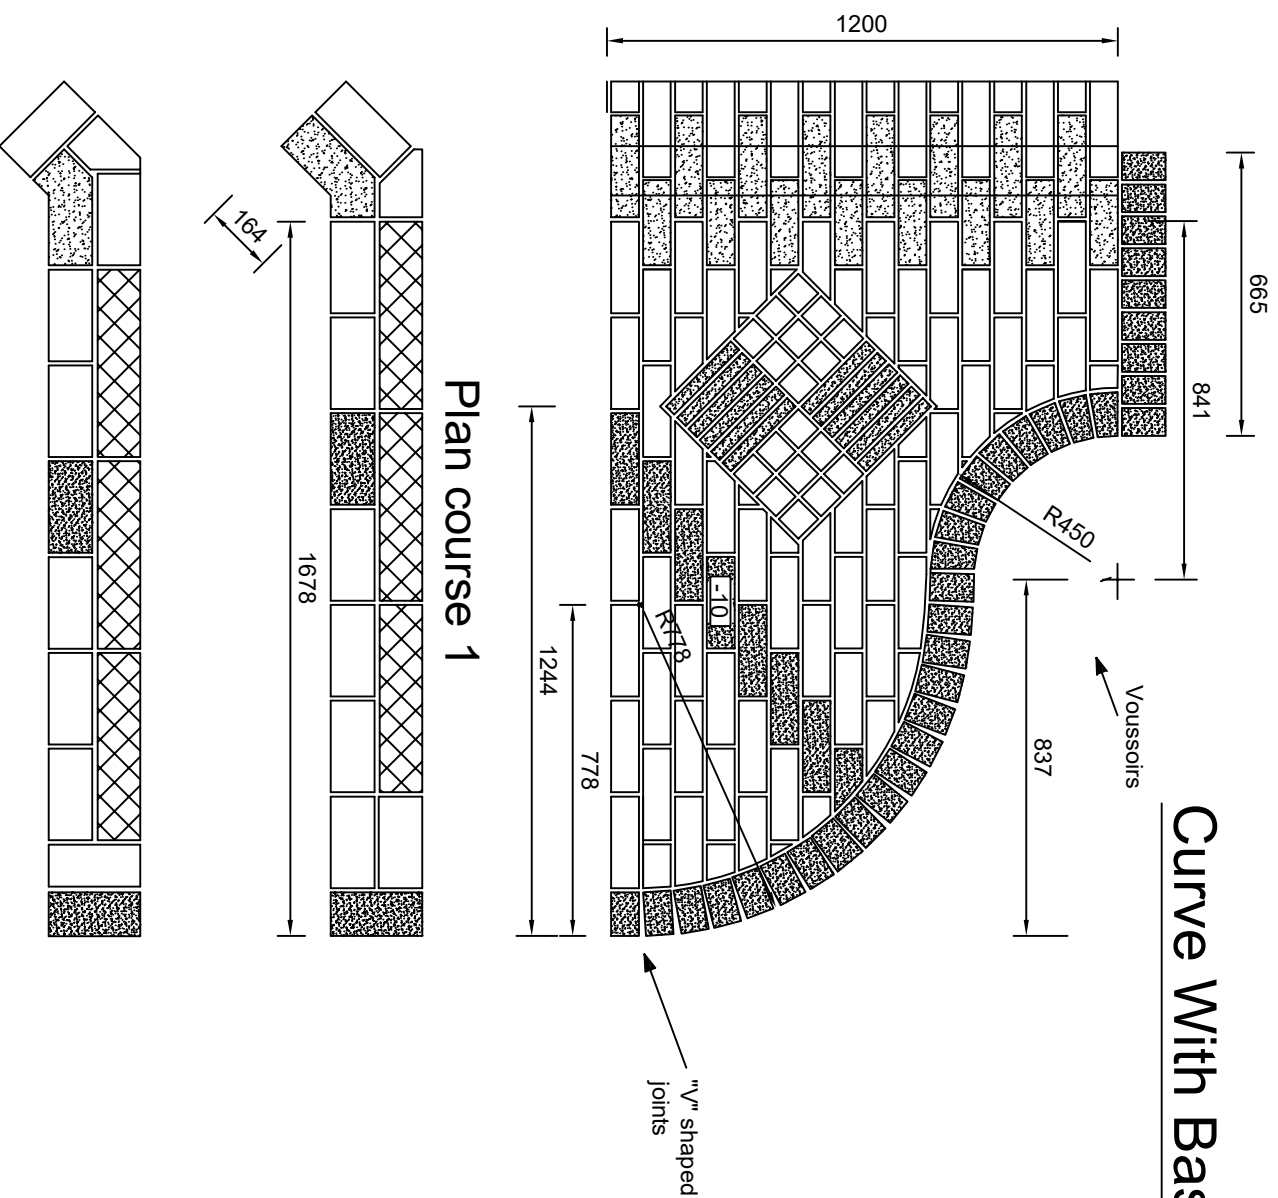

## SPECIFICATION

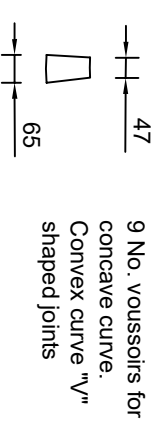

All bricks on diagonal rake to be set back 10mm

10mm timber pad to be walled between course 1 and 2 to receive fixing for trammel.

Gauge 4 course to 300mm.  
All work to be recessed 8mm and ironed smooth with the exception of:-  
Contrast on diagonal rake to be Flush joint finish. (all joints surrounding *contrast bricks*)  
Contrast bricks on curve and Brick on Edge to be weatherstruck.  
Basketweave panel to be pointed in coloured mortar with weatherstruck joint finish.

Do not scale from drawing.

Plan course 2

Plan course 1